



## Installation & Operation Manual

Do not use this equipment before reading this manual!

# STEP Touch® Thermostat

## The Ideal Way to Control Your STEP HEAT® System



The STEP Touch® thermostat from Electro Plastics is the elegant way to control your STEP HEAT® system.

Perfectly suited and designed from the ground up to work seamlessly with all STEP Systems.

### Features:

- Clean, simple two control design for ease of operation
- Three digit auto-dimmable LED Display
- Touch sensor controls that are maintenance free
- Clear, totally flat acrylic surface for a clean, contemporary look that works well with any decor
- Elegant stainless steel perimeter housing
- Displays in Fahrenheit or Celsius
- Interfaces to an external temperature sensor
- Works with STEP Warmfloor® STEP® Snowmelt and STEP® Deicing systems
- Choice of black or white faceplate colors.
- Capable of interfacing with smart home systems
- No batteries needed. All settings are stored in permanent memory for instant recovery in the event of a power failure
- STEP® logo is lit when system is heating
- Green friendly low power design

### Specifications:

Set Range: 40° to 90°F • 4° to 32°C

Internal Ambient Temp Range: 0° to 99°F, +/-1°F • -9° to 37°C, +/-0.5°C

External Sensor Temp Range: 0° to 99°F / -9° to 37°C

Power: 9-24V AC/DC @ <10mA (without external temperature sensor)

Model Number:

EPI-LX-TC (Thermostat)

EPI-LX-TS (External Sensor)

Made in the U.S.A.

### Note:

This manual contains important warnings and instructions. Please read and retain for reference.

# Physical Description

The STEP® Touch electronic thermostat is a zone control device specially designed for use with the STEP HEAT® radiant heat system. The STEP® Touch provides a pulsed output that complements the self-regulating nature of the STEP HEAT® heating elements to offer the homeowner the highest energy efficiency while providing better zoned control over personal comfort.

## Thermostat

The thermostat is the operator interface for the STEP HEAT® system. It is designed to be flush wall mounted in a place that will be most representative of the zone it controls. The thermostat consists of a digital display that indicates the measured air temperature or set temperature, touch sensitive switches for control of the set point, the air temperature sensor and indicators for the external sensor mode, snowmelt mode and logo illumination.

## Regulator

The regulator is an intelligent soft-start switch that enables/disables the line voltage in such a way that does not harm the transformer(s) and gently applies the load to the power system. The regulator consists of a printed circuit board mounted inside the power supply housing or can be purchased separately, mounted in an aluminum enclosure with heat sink, to be added to an existing system. Each regulator is designed to handle up to 1,500W of load.

The thermostat and power supply are connected together using a length of 3 conductor shielded cable. For control of a zone with a load larger than 1,500W, unlimited power supplies can be connected to one STEP® Touch thermostat.

# Functional Features

## Interface:

To switch the system “ON”, hold both “Up” and “Down” capacitive sensing proximity switches (no membrane switches) for about 4 seconds.

These switches are also used to modify the “Set Temperature”. Normally the display will show the ambient temperature, however when any switch is pressed, the Set Temperature is displayed for 3 seconds and the units (F or C) digit is flashed. If a switch is pressed again, while the Set Temperature is displayed the Set Temperature is modified.

If both the “Up” and “Down” switches are held for more than 4 seconds, the unit will go into shutdown mode and completely turn the system off. While these switches are held the display will count down, i.e.: “3”, “2”, “1”, “OFF”. During this time all setting information is saved in memory and recovered on power-up.

All settings are permanently stored in flash memory (no batteries) so that in the case of a power failure, there will be no need to modify any settings. This also includes shutdown mode, i.e.: if you are out of town and the unit is in shutdown mode a power fluctuation will not cause the unit to re-enable.

## Output:

When the temperature measurement from either the internal ambient air sensor or the external floor sensor (depending on the mode of operation) is below the Set Temperature, the unit will trigger the system to activate and the STEP® logo will illuminate indicating heat is being called for.

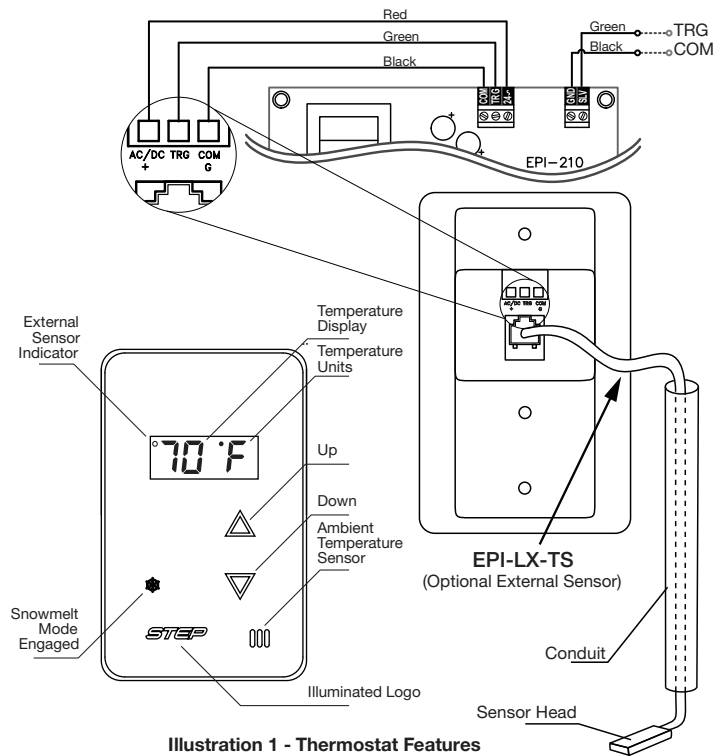


Illustration 1 - Thermostat Features

## Internal Temp Sense:

Ambient temperature is sensed via the three vent slots on the front panel.

## External Temp Sense:

The unit also provides for the sensing of temperature externally via the EPI-LX-TS sensor supplied. This could be necessary, if the thermostat is located in an area that has a falsely high temperature or when it is more important to control the floor temperature. It would also be used in the case of Snowmelt mode where the sensor would need to be installed in the concrete or roof that is being heated. This connection is made via a very common 6 position 4 contact modular connector and allows the sensor to be extended to a maximum distance of 200 feet. The external sensor has a small micro-controller built in and digitally transmits the temperature data so there is no loss in accuracy with distance.

## Home Control Shutdown:

It is also possible, via the modular jack on the rear of the unit, that the unit can be shut down via a relay closure from an external Home Control system. If Pins 1 and 6 are shorted together the unit will shutdown.

## DIP SWITCHES:

Dip switches are extremely easy to access via the magnetically attached front panel. No fasteners or annoying plastic clips. Electrical connection between the front panel and the base are made via gold-plated, spring-loaded contacts ensuring extremely long life. The 4 position dip switch is located on the inside of the front panel PCB.

**FACEPLATE REMOVAL:** The faceplate is retained via high power magnets. *Illustration 2* shows proper technique to remove the faceplate and gain access to the dip switches and connections. In order to remove, first place your thumbs on the bottom edges of the faceplate and lightly brace the top with your fingers. Press your thumbs in firmly at the corners until the top pops free from the housing, and rotate the top of the display away with your fingers until it is free.

**1. C/F:** Simply changes the temperature units between Celsius and Fahrenheit. The Up/ON position displays °F, and the Down/OFF position displays °C.

**2: AUTODIM MODE; "DIM":** Many people do not like a bright LED display to be on all the time, especially at night. The Auto Dim feature simply dims the display when the unit is not being modified. If a switch is pressed, the display is brightened and stays bright for several seconds after modifications have been completed. When AutoDim mode is not enabled, the display is bright all the time.

**3. EXTERNAL TEMPERATURE SENSOR; "EXT":** When this switch is enabled the unit will make decisions based on the temperature reading from the external sensor. The display will always show the temperature of the external temp sensor, however if the user wishes to check the ambient temperature, they can simply press and release both the "Up" and "Down" switches within 1 second and the ambient temperature will be displayed for several seconds, after which, it will revert to the temperature of the external sensor. If, by mistake, both the External Temperature switch and the Snowmelt switch are activated, the Snowmelt switch is dominant and this mode will be enabled. Whenever the external sensor is active the dot in the upper left-hand corner of the display will be illuminated.

## Installation

The STEP® Touch thermostat can be used in conjunction with all the EPI-LX-R power supply series and the STEP® DC Controllers. Be sure to install the thermostat on an interior wall away from direct sun and drafts. Measure the distance from the power supply to the thermostat to identify the length of the thermostat wire. The STEP Touch low-voltage thermostat is connected to the power supply using a 3-conductor shielded cable and can control unlimited power supplies or DC Controllers.

The process of installing the EPI-LX-TC involves preplanning of mounting locations and roughing in of the necessary hardware. The installation of the EPI-LX-TC typically occurs during new construction or a remodel project where access to the walls is not possible for the rough in work. If access to the walls is not possible, as during some remodel projects, the EPI-LX-TC installation may require the use of surface mounted raceway products.

### Plan Mounting Locations

Locate the thermostat approximately 60 in (152 cm) off the floor in a location that is most representative of the zone that it controls. Do not install where exposed to direct sunlight or drafts.

## 4. SNOWMELT MODE; "SM":

This mode is enabled when the thermostat is being used with the snowmelt and deicing elements. The external temp sensor is installed in the concrete or on the roof and the Set Temperature is adjustable between 32°-41°F/0°-5°C. This value is maintained in flash memory. The display will show this measurement and, as with external mode, when both the UP/DOWN switches are pressed and released within 1 second, the display will show the ambient temperature for a short period after which it will revert to the external temperature sensor. When in Snowmelt mode, the snowflake logo on the front panel will glow blue.

Illustration 2 - Faceplate Removal

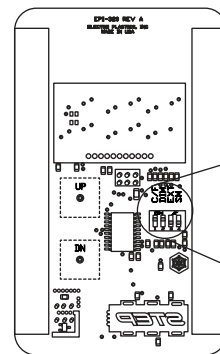


Illustration 3 - DIP Switches

### Rough In

The thermostat is designed to be flush mounted on a single gang junction box. Install such a box at the desired mounting location. Install the supplied 3-conductor shielded cable between the housing and the power supply. The cable can be installed in the wall without the use of conduit as it only carries a low voltage signal. If the cable is not long enough, acquire a suitable length of an equivalent cable sufficient to run the full length between the boxes. Do not splice the cable – only use a full new length. If an additional power supply will be connected, install the supplied 3-conductor shielded cable between the supplies.

### Thermostat

Terminate the 3-conductor shielded cable to the thermostat. Trim back the shield flush with the outer cable jacket and do not ground the drain (non-insulated) wire at the thermostat, only ground the drain wire at the "COM" terminal on the regulator. Remove the faceplate from the housing to expose the mounting holes. Push the excess cable into the box and install the Thermostat using the screws provided. Reinstall the faceplate onto the housing.

# Operation

## Normal Operation

The STEP® Touch digital display indicates the measured room temperature during normal operation.

## Switching On/Off

To switch the STEP® Touch thermostat on, simultaneously hold the “Up” and “Down” switches for about 4 seconds. To switch the thermostat off, Hold the “Up” and ”Down” switches for another 4 seconds and the display will count down “3”, “2”, “1”, “OFF”, at which point the STEP HEAT® system will completely power down.

## Set-point Change

The set-point is modified by using the “Up” and “Down” switches located on the thermostat faceplate. The first press of the switches will cause the digital display intensity to increase and to display the present set-point. Subsequent pressing of the switches will allow you to change the set temperature to the desired setting. After a few seconds of inactivity, the digital display will dim back to its original intensity and will return to displaying the measured room temperature.

## Error Codes

“E1”: The unit is not calibrated. The unit will function normally, but every so often will flash “E1”. This calibration is done during process testing. Contact your local distributor if you see this code.

“E2”: The unit is set to either “Snowmelt” or “External Sensor” mode, but no sensor is connected. If you receive this error code with a sensor connected the sensor may need to be replaced.

# Mechanical Features

External  
(Front)

3 Digit Auto-Dimmable LED Display (e.g.: 70° F)  
UP Touch Switch (not membrane switch)  
DOWN Touch Switch (not membrane switch)

External  
(Rear)

3 Position Terminal Block (AC/DC, TRG, COM)  
6 position 6 Contact Modular Jack

Internal  
(DIP Switch)

Celsius/Fahrenheit Switch (C/F)  
AutoDim Switch (DIM)  
External Temperature Sensor Mode Switch (EXT)  
Snowmelt Mode Switch (SM)

## Specifications

Internal Ambient Temp Range:	0° - 99°F / -9° - 37°C
External Sensor Temp Range:	0° - 99°F / -9° - 37°C
Internal Sensor Mode Set Temp Range:	40° - 90°F / 4° - 32°C
External Sensor Mode Set Temp Range:	40° - 90°F / 4° - 32°C
Snow Melt Mode Set Temp Range:	32° - 41°F / 0° - 5°C
Power:	9-24V AC/DC @ 12mA max

# Physical Dimensions

